
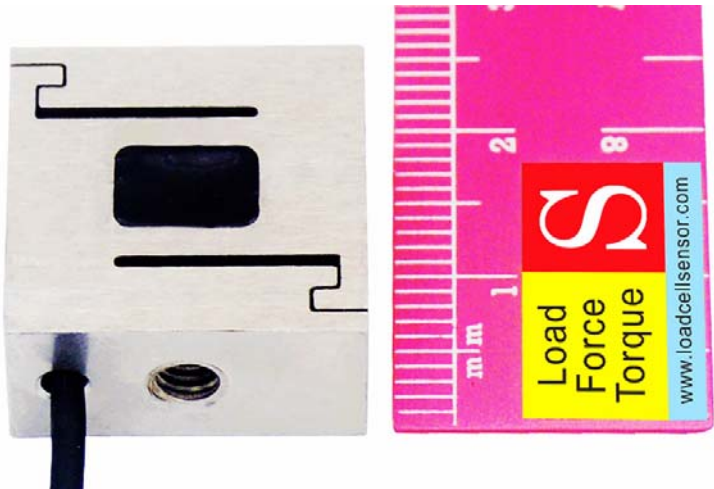


Dimensions in "mm"

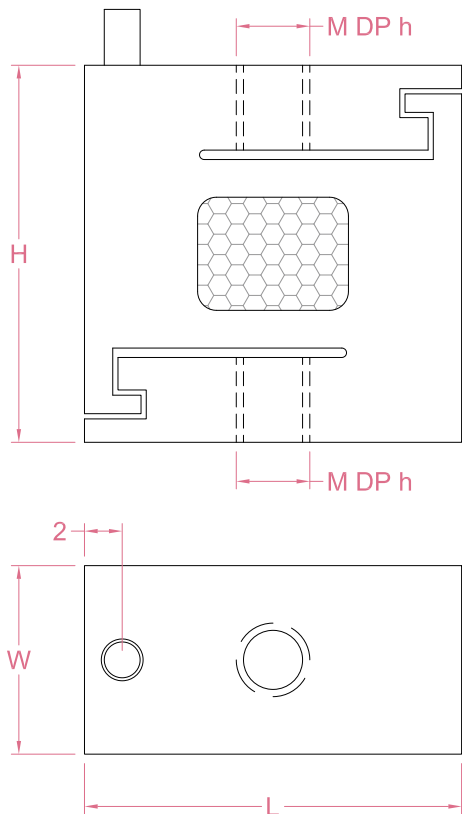

Order example:
2 x LCS16 -20kg- M4

Quantity Model Capacity M4,M5
M6,M8

Email to sales@loadcellsensor.com for a quote


M	h	H	W	L	Capacity(kg)
M4	5	22	6	20	5/10/20/30
M5	6	26	8	20	10/20/30/50
M6	8	32	10	22	10/20/30/50/100
M8	10	38	12	25	20/30/50/100/200

Specifications			
Rated Capacity	5/10/20/30/50/100/200 kg		
Rated Output	2.0 mV/V	Compensated Temp.	0...+40°C
Excitation	3~12V	Operating Temp.	-20...+60°C
Zero Balance	±0.05 mV/V	Temp. Coeff. of Zero	±0.03% F.S./°C
Nonlinearity	±0.2% F.S.	Temp. Coeff. of Span	±0.02% F.S./°C
Hysteresis	±0.2% F.S.	Input Resistance	380±30 Ohms
Nonrepeatability	±0.1% F.S.	Output Resistance	350±5 Ohms
Creep(3min)	±0.1% F.S.	Insulation Resistance	>2000M Ohms(50V)
Safe Load Limit	150% F.S.	IP Rating	IP62
Breaking Load	200% F.S.	Element Material	Stainless steel
Cable	Ø1.9*2000mm 4-conductor shielded cable		


• LCS reserves the right to modify its design and specifications without notice

P:1/2

Load direction

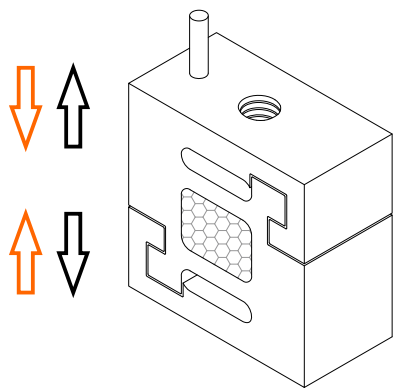

Wiring Code@Compression

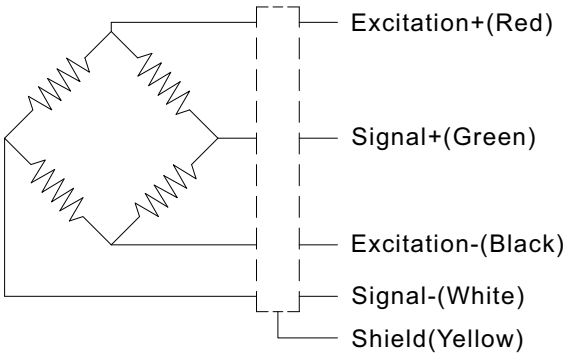

Shield is NOT connected to the sensor body

Sensor/Amplifier/Indicator

Items	Power supply	Output/Function
LCS16	3-12V (Constant)	-24mV...+24mV (Depending on the power supply)
LCS16 + Analog amplifier	12~24V DC	0-3.3V,0-5V,0-10V,0-2.5-5V,0-5-10V -3.3-3.3V,-5-5V,-10-10V 0-20mA,4-20mA,4-12-20mA...
LCS16 + Digital amplifier	12~24V DC	RS485 or RS232 output
LCS16 + Indicator	12~24V DC	Display force value Switch/Relay output Peak holding RS485/RS232 interface 0-5V/0-10V/4-20mA output
Email us for datasheet of amplifier and indicator		