


Dimensions in "mm"

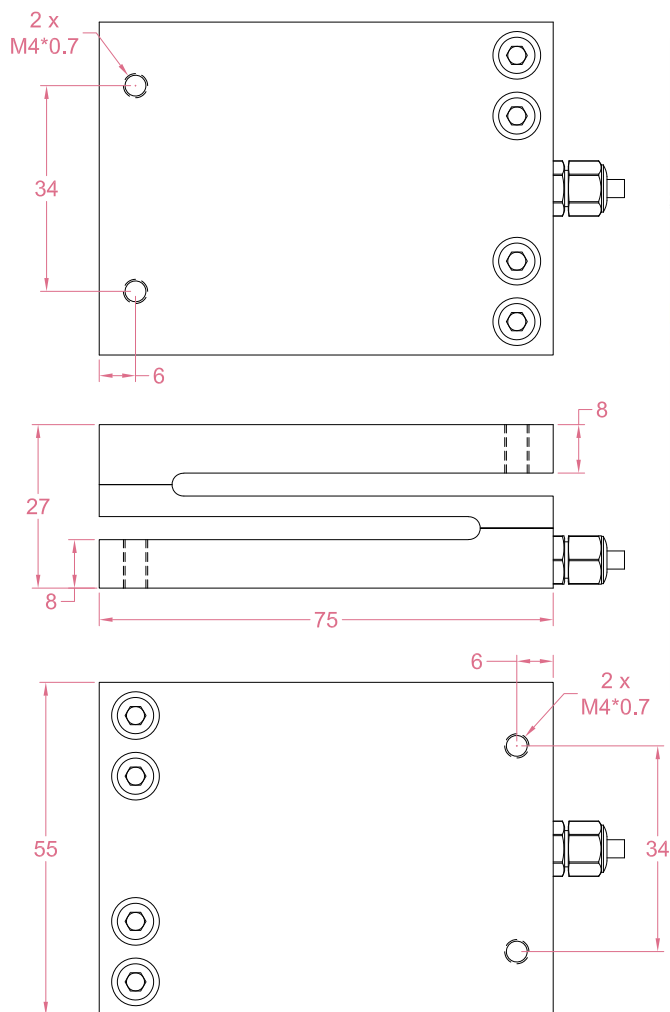

CE

Order example:

2 x SLC01 - 100kg

Quantity

Model

Capacity


Email to sales@loadcellsensor.com for a quote

Specifications			
Rated Capacity	20/50/100/200kg		
Rated Output	2.0 mV/V	Compensated Temp.	0...+40°C
Excitation	3~15V	Operating Temp.	-20...+60°C
Zero Balance	±0.1 mV/V	Temp. Coeff. of Zero	±0.03% F.S./°C
Nonlinearity	±0.3% F.S.	Temp. Coeff. of Span	±0.02% F.S./°C
Hysteresis	±0.3% F.S.	Input Resistance	385±30 Ohms
Nonrepeatability	±0.1% F.S.	Output Resistance	350±5 Ohms
Creep(5min)	±0.05% F.S.	Insulation Resistance	>2000M Ohms(50V)
Safe Load Limit	150% F.S.	IP Rating	IP62
Breaking Load	200% F.S.	Element Material	Aluminum alloy
Cable	Ø3*3000mm 4-conductor shielded cable		


- LCS reserves the right to modify its design and specifications without notice

P:1/2

Load direction

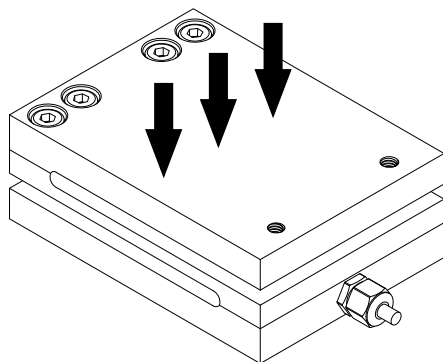

Wiring Code

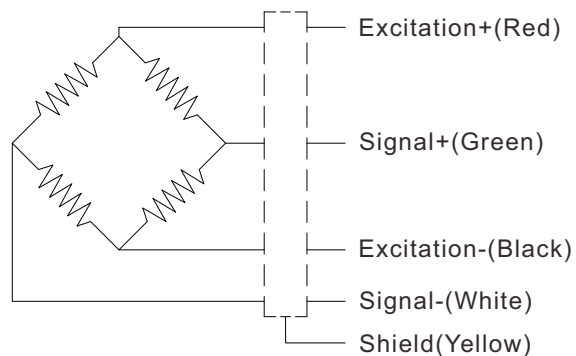

Shield is NOT connected to the sensor body

Sensor/Amplifier/Indicator

Items	Power supply	Output/Function
SLC01	3-15V (Constant)	0mV...+30mV (Depending on the power supply)
SLC01 + Analog amplifier	12~24V DC	0-3.3V,0-5V,0-10V, 0-20mA,4-20mA...
SLC01 + Digital amplifier	12~24V DC	RS485 or RS232 output
SLC01 + Indicator	12~24V DC	Display force value Switch/Relay output Peak holding RS485/RS232 interface 0-5V/0-10V/4-20mA output
Email us for datasheet of amplifier and indicator		